

butech

**professionals
tools**

PORCELANOSA Grupo

INDEX

4 XTONE TOOLS

10 CERAMIC TILE CUTTING, DRILLING, AND MITERING

22 MIXING OF MORTARS AND JOINT MATERIALS

26 SPACERS AND SEPARATORS FOR TILING JOINTS

31 TOOLS AND ACCESSORIES FOR INSTALLING CERAMICS

The product images shown are not to scale.

XTONE cutting guide

Dry-cutting system for large-format slabs using roller disc cut and splitting with pliers.

- It includes:
- Three 110 cm cutting guides
 - Sliding group for incision-marking pieces with a 22mm diameter roller disc cut
 - Splitter pliers for slabs up to 10 mm

- Cutting length: 320 cm
- Fixing to the cutting board using 2 suction cups per guide



SAP

100337024

Description

(3 units)

Workbench 1800x 1044 x 700 mm

Workbench for cutting and handling large-format XTONE type ceramic sheets. It has a coupling system to join two workbenches to achieve a length of 360 cm.

- Features:
- Table dimensions: 104 x 180 cm.
 - Working height: 70 cm
 - Maximum weight: 250 kg.

Workbench 1800 x 1044 x 700 mm

- 4 side protection rubber buffers.
- 5 support bars.
- 4 folding legs with safety lock
- Weight: 34.5 kg



SAP

100315693

Description

(1 unit)

XTONE extending frame 2022

Frame with 2 extendable conveyors for plates up to 320 cm in length. Especially recommended for large-format slabs such as XTONE laminated porcelain stoneware.

This frame's main features are the following:

- Slab length: 165-320 cm
- Maximum weight: 170 kg

- Length: 170-380 cm
- 6 vacuum suction cups Ø 20 cm
- 4 handles distributed 2 per guide.
- Weight: 34 kg



SAP

100317362

Description

(1 unit)

XTONE Frame carriage

Transport trolley for XTONE type large-format ceramic sheets with a thickness greater than or equal to 6 mm. Compatible with the Extensible frame XTONE 2022 and the Workbench 1800 X 1044 X700 from Butech.

- Features:
- Dimensions: 160 x 360 cm.
 - Maximum weight: 140 kg.

XTONE Frame carriage

- Extendable bar to facilitate its use with the Workbench 1800 X 1044 X 700.
- 6 side protection rubber buffers.
- 4 swivel wheels with braking and locking system
- Weight: 15 kg



SAP

100317363

Description

(1 unit)

XTONE extending frame

Frame with 2 extending transporters for slabs up to 340 cm in length. Specially recommended for large-format slabs such as XTONE laminated porcelain tile

- This frame's main features are the following:
- Slab length: 180-340 cm
 - Slab width: 40-160 cm
 - Maximum weight: 150 kg

- Length: 180-340 cm
- 6 vacuum suction cups
- 6 handles plus four side guards against blows.



SAP	Description
100201778	(1 unit)

XTONE 336 cm cutting guide

Dry-cutting system for large-format slabs using roller disc cut and splitting with pliers. Compatible with RM3 electric cutter for cutting guides.

- It includes:
- Two 160 cm cutting guides
 - Sliding group for incision-marking pieces with a 16mm diameter roller disc cut
 - Splitter pliers for slabs up to 12 mm

- Cutting length: 336 cm
- Cutting length extendable up to 451 cm with the use of extenders
- Fastening to slab to cut using suction cups



SAP	Description
100357833	(2 units)
100358265	(1 unit) Extender

RM3 electric cutter for cutting guide

Electric dry cutter for straight cutting. Compatible with the RM3 XTONE cutting guide 330 cm

- Characteristics:
- Cutting depth for 90°: 20 mm
 - Cutting depth for 45° and 180° : 16 mm
 - Pre-installation for wet cutting and dust suction



SAP	Description
100357834	Chasis Elect.Cutter RM3 cute guide + Disc
100357840	Chasis USA Elect.Cutter RM3 cute guide + Disc

RM3 electric cutter for cutting guide

- Compatible with the RM3 XTONE straight cutting guide 330 cm
- Perpendicular dry cut : 45° (mitred) / 90° (cut) / 180° (groove for façade)
- 125 mm diameter cutting disc

Water sprayer

Water sprayer for RM3 electric cutter. Compatible with RM3 chassis and electric cutter.


- Characteristics :
- Capacity: 8 liters
 - Includes pressure valve
 - Pressurized water tank for cooling the RM3 electric cutter


Water sprayer for RM3 cutter


- Eliminates dust emissions
- Improves the quality of the cut
- Accelerates the cutting process





SAP	Description
100244692	Water sprayer for RM3 Elect.Cutter


XTONE Tools		XTONE cutting	XTONE Tools	XTONE accessories
Roller disc for XTONE cutting guide				
Roller disc for XTONE cutting guide, suitable for all types of ceramic tiles. Maximum precision and minimum vibration; no chipped tiles.				
It includes fastening bolt.				
				
		<ul style="list-style-type: none">- Compatible with the XTONE cutting guide- Porcelain tile		
SAP	Description		SAP	
100153330	16 mm		100120765	

XTONE cutter				
Diamond blade for marking slabs with incision during their cut.				
				
		<ul style="list-style-type: none">- Porcelain tiles and glass		
SAP			SAP	Description
100120764			100303049	90 W 230V/42V 50-60Hz

Splitter pliers for XTONE				
Pliers for separating slabs previously marked with the XTONE cutting guide. Specially recommended for large-format slabs such as XTONE laminated porcelain tile.				
				
		<ul style="list-style-type: none">- Suitable for thicknesses of 6 to 20 mm- Applying pressure with adjusting screw- Manufactured in galvanized steel, high strength.		
SAP			SAP	Description
100120771			100120769	35 cm Solid rubber


XTONE joint adjustment device				
Device for adjusting the position of adjacent slabs. It allows for the modification of the tiling joint between the slabs without hitting them, which could damage the slabs				
Specially recommended for installation with a minimal joint.				
				
		<ul style="list-style-type: none">- Adjustment by turning the center screw- 2 swiveling groups with 3 Ø12 cm suction cups- Manufactured in non-staining gray rubber		

XTONE vibrator				
Vibrator for settlement of large-format slabs. Specially recommended for large-format slabs such as XTONE laminated porcelain tile				
Characteristics:				
<ul style="list-style-type: none">• 2-speed vibration: 6,000 / 8,200 rpm• Weight: 11.2 kg• It includes 230/42V transformer				
				
		<ul style="list-style-type: none">- Floor and wall tile- 25 x 45 cm non-staining grey rubber base- Ergonomic handle		

XTONE rubber trowel				
Rubber trowel for applying pressure on newly-installed ceramic tiles and improving contact with the bonding material. Specially recommended for large formats and XTONE slabs				
				
		<ul style="list-style-type: none">- Solid rubber sheet- Off-center handle for easier handling.		

XTONE abrasive sponge

Abrasive sponge for ceramics. Suitable both for rectifying cuts and minor deviations and for softening edges.

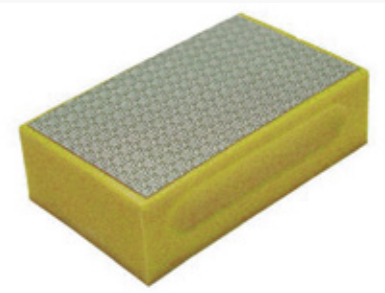

- 200 grain

SAP	Description
100120766	55 x 90 mm

XTONE notched trowel

Angle-notched trowel for installation of large-format slabs such as XTONE laminated porcelain tile

- Advantages:
- Overlapping of adhesive seams creating greater contact between tile and bonding marterial
 - Reducing gaps under tiles
 - The partially-rounded edges of the notches facilitate the application of the adhesive



- 28x6 cm angle-notched trowel
- 0.7 mm Stainless steel sheet
- Ergonomic open handle with aluminum core.

SAP	Description
100120768	28 cm 6 x 6 mm

XTONE double suction cup

Tool for handling tiles, specially recommended for large-format slabs and tiles

Manufactured in aluminum, it has an ergonomic open handle that facilitates the handling of the slabs and ceramic tiles. Do not use with formats smaller than 350 mm.



- Up to 90 kg
- All kinds of tile formats and thicknesses.
- Manufactured in non-staining gray rubber

SAP	Description
100120773	Ø 11,5 cm Double

Ceramic tile cutting, drilling, and mitering

TZ-850 hand cutting machine

Hand cutter for perfect cutting of ceramic tiles, especially for cutting tiles, glazed or extruded tiles, and porcelain tiles.

- This cutter’s main features are the following:
- Mobile separator with 1.000 kg. power, for cutting harder materials.
 - Two-material handle with a cared-for ergonomic design,
 - Aluminum cutting base made up of two sheets with buffering effect.
 - Side stopper to make repetitive cuts and swivel angle for angle cuts
 - Guide system of double reinforced cut with stainless steel profiles.
 - Roller discs of Ø8 to 22 mm adaptable to each material to obtain maximum performance and cutting quality.
- It includes carrying case and two Ø8 to 18 mm roller discs



- Cutting length: 71 cm
- Diagonal cutting length: 50 x 50 cm
- Cutting thickness: 6-20 mm

SAP	Description
100259637	TZ-850

TZ-1020 hand cutting machine

Hand cutter for perfect cutting of ceramic tiles, especially for cutting tiles, glazed or extruded tiles, and porcelain tiles.

- This cutter’s main features are the following:
- Mobile separator with 1.000 kg. power, for cutting harder materials.
 - Two-material handle with a cared-for ergonomic design,
 - Aluminum cutting base made up of two sheets with buffering effect.
 - Side stopper to make repetitive cuts and swivel angle for angle cuts
 - Guide system of double reinforced cut with stainless steel profiles.
 - Roller discs of Ø8 to 22 mm adaptable to each material to obtain maximum performance and cutting quality.
- It includes carrying case and two Ø8 to 18 mm roller discs



- Cutting length: 93 cm
- Diagonal cutting length: 65 x 65 cm
- Cutting thickness: 6-20 mm

SAP	Description
100259673	TZ-1020

TZ-1300 hand cutting machine

Hand cutter for perfect cutting of ceramic tiles, especially for cutting tiles, glazed or extruded tiles, and porcelain tiles.

- This cutter’s main features are the following:
- Mobile separator with 1.000 kg. power, for cutting harder materials.
 - Two-material handle with a cared-for ergonomic design,
 - Aluminum cutting base made up of two sheets with buffering effect.
 - Side stopper to make repetitive cuts and swivel angle for angle cuts
 - Guide system of double reinforced cut with stainless steel profiles.
 - Roller discs of Ø8 to 22 mm adaptable to each material to obtain maximum performance and cutting quality.
- It includes carrying case and two Ø8 to 18 mm roller discs



- Cutting length: 125 cm
- Diagonal cutting length: 85 x 85 cm
- Cutting thickness: 6-20 mm

SAP	Description
100213683	TZ-1300

TZ-1550 hand cutting machine

New type of hand cutting machine with maximum cutting power for all types of ceramic tiles, including formats with side up to 130 cm long

This cutter's main features are the following:

- Mobile separator with 1.500 kg. power, for cutting tiles up to 21 mm.
- Flexural strength and sturdiness never-before-seen in a hand ceramic tile cutter.
- Supplement base for excellent support of the ceramics.
- Side stopper to make repetitive cuts and swivel angle for angle cuts
- Double-cut guide system with reinforced extruded aluminum structure.
- Roller discs of Ø8 to 22 mm adaptable to each material to obtain maximum performance and cutting quality.

It includes carrying bag with wheels and two Ø8 to 18 mm roller discs



- Cutting length: 150 cm
- Diagonal cutting length: 110 x 110 cm
- Cutting thickness: 3-21 mm

SAP	Description
100223745	TZ-1550

TZ-1800 hand cutting machine

New type of hand cutting machine with maximum cutting power for all types of ceramic tiles, including formats with side up to 130 cm long

This cutter's main features are the following:

- Mobile separator with 1.500 kg. power, for cutting tiles up to 21 mm.
- Flexural strength and sturdiness never-before-seen in a hand ceramic tile cutter.
- Supplement base for excellent support of the ceramics.
- Side stopper to make repetitive cuts and swivel angle for angle cuts
- Double-cut guide system with reinforced extruded aluminum structure.
- Roller discs of Ø8 to 22 mm adaptable to each material to obtain maximum performance and cutting quality.

It includes carrying bag with wheels and two Ø8 to 18 mm roller discs



- Cutting length: 180 cm
- Diagonal cutting length: 120 x 120 cm
- Cutting thickness: 3-21 mm

SAP	Description
100341717	TZ-1800

TZ plus roller disc

Roller discs for ceramic tile hand cutters, for a maximum precision and minimum vibration; no chipped tiles

They differ by the diameter of the wheel:

- Ø 8 mm Clean and shallow incision; suitable for porcelain tiles
- Ø 10 mm Deep incision; especially recommended for embossed tiles
- Ø 18 mm Clean and shallow incision; especially recommended for large formats
- Ø 22 mm Deep incision; especially recommended for hard materials

8mm, 18mm and 22mm roller discs are also compatible with TX manual cutters



- Compatible with TZ hand cutters
- Wheel made with tungsten carbide
- High resistance and life

SAP	Descripción
100224001	8 mm
100223949	10 mm
100223990	18 mm
100244042	22 mm Extreme

Ceramic tile cutting, drilling, and mitering

RM 2200 electric cutter

Electric cutter with water-pump cooling system with regulation tap, for cutting and mitering ceramic tiles.

The main features of this electric cutter are the following:

- 3 HP Sliding motor on bearings, suitable for mitred cutting tiles with thickness up to 50 mm
- 300-360 mm blade diameter
- Power supply: 230V-50 Hz.
- Spacious work table with double set of plates, a special one for miters.
- Pulley for the movement of the cutter.

It includes carrying case, cutting blade, and connection cable



SAP	Description
100242376	Electric cutter

- Cutting length: 2200 cm
- Diagonal cutting length: 155 x 155 cm
- Cutting thickness: 90 mm

RB 1300 electric cutter

Electric cutter with water-pump cooling system with regulation tap, for cutting and mitering ceramic tiles. It is equipped with a 2mW laser tracer.

The main features of this electric cutter are the following:

- 3 HP Sliding motor on bearings, suitable for longitudinal cutting as miter up to 132 cm in length.
- 250 mm blade diameter
- Power supply: 230V-50 Hz.
- Spacious work table with double set of plates, a special one for miters.
- Side stopper to make repetitive cuts.

It includes carrying case. Power supply cord and cutting disc not included.



SAP	Description
100153447	RB 1300
250040700	Cable


- Cutting length: 1320 cm
- Diagonal cutting length: 93.5 x 93.5 cm
- Cutting thickness: 51 mm

SG XL hand cutter

Hand cutter for perfect cutting of ceramic tiles, especially for cutting large-format tiles, glazed or extruded tiles, and porcelain tiles.

- This cutter's main features are the following:
- Mobile separator with 700 kg. power
 - Ergonomic handle
 - 100 mm wide cutting lever
 - Side stopper to make repetitive cuts and swivel angle for angle cuts
 - Single-cut guide system in aluminum
 - Ø 13 mm roller disc

- Cutting length: 205 cm
- Diagonal cutting length: 180 x 180 cm / 200 x 30 cm
- Cutting thickness: 6-20 mm

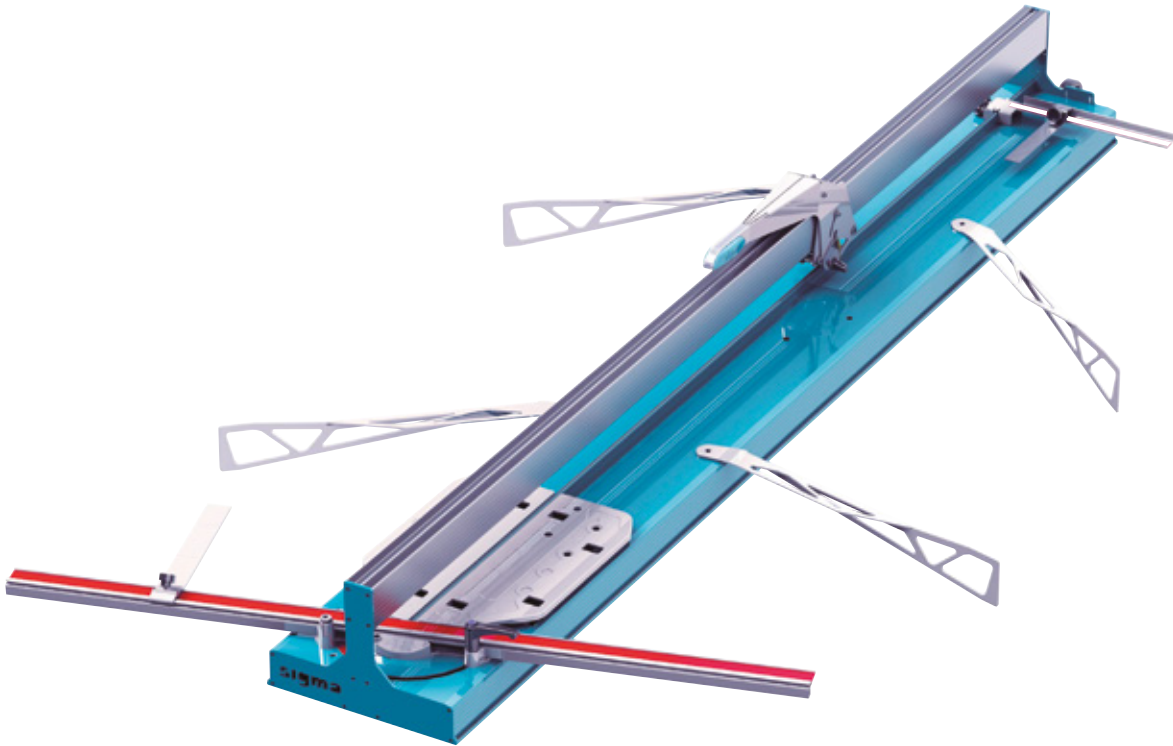

SAP	Description
100179062	205 cm

SG XL roller disc

Roller disc for SG XL manual cutting machines



- Compatible with SG XL hand cutters
- Porcelain tile


SAP	Description
100179071	13 mm

SG 3 MAX hand cutter

Hand cutter for perfect cutting of ceramic tiles, especially for cutting tiles, glazed or extruded tiles, and porcelain tiles.

- This cutter's main features are the following:
- Mobile separator with 1,200 kg power
 - Ergonomic handle
 - Padded cutting lever
 - Side stopper to make repetitive cuts and swivel angle for angle cuts
 - Single-cut guide system in steel
 - Ø 19 mm roller disc

- Cutting length: 126.4 cm
- Diagonal cutting length: 89.4 x 89.4 cm
- Cutting thickness: 6-20 mm

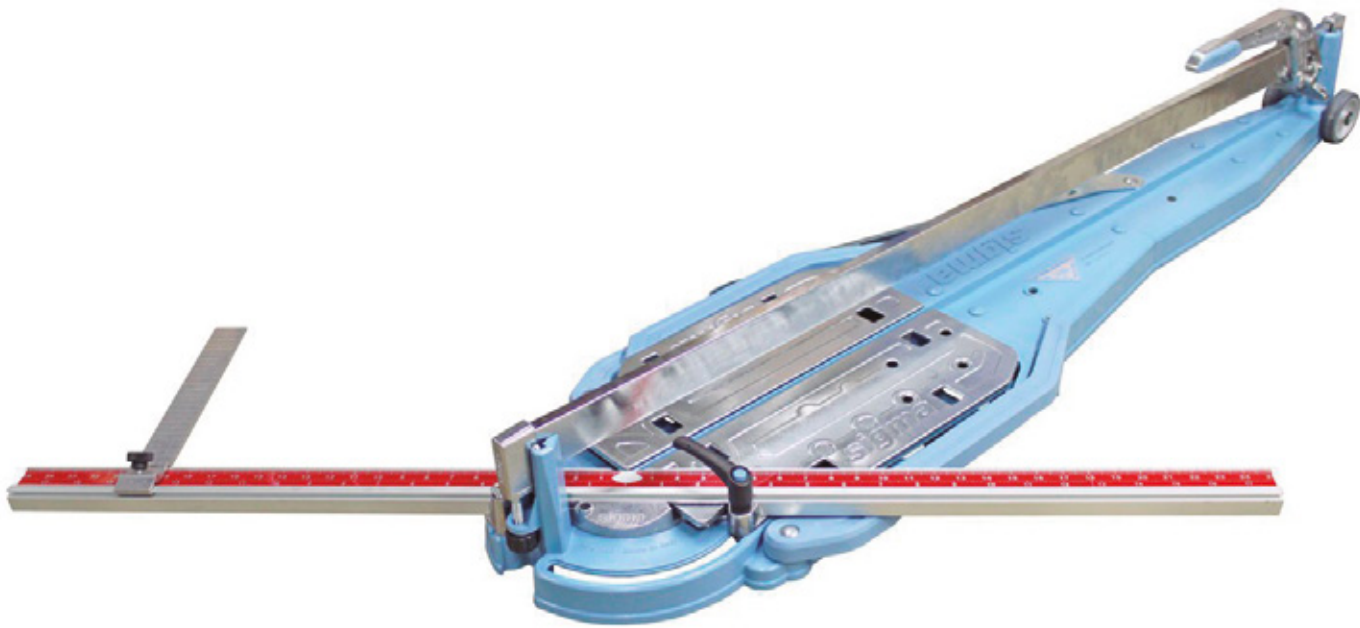

SAP	Description
100180421	126 cm

RB1S plus porcelain tile cutting disc

Dry-cutting blade for porcelain tile and hard materials. High performance and cutting speed with high quality finishes. Only for straight cut, do not use for miters.

- Dimensions:
- Outer diameter: 115/125 mm
 - Inner diameter: 22.2 mm
 - Disk pad height: 10 mm
 - Disk pad thickness: 1.4 mm

SAP	Description
100049688	115 mm
100049694	125 mm



- Dry cutting
- Porcelain tile
- Hard materials such as: granite, slate, and rustic tiles

RB1H plus porcelain tile cutting blade

Wet-cutting blade for porcelain tiles. High performance and cutting speed with high quality finishes. Only for straight cut, do not use for miters.

- Dimensions:
- Outer diameter: 250/300 mm
 - Inner diameter: 25.4 mm
 - Disk pad height: 10 mm
 - Disk pad thickness: 1.6 mm

SAP	Description
100179070	250 mm



- Wet cutting
- Porcelain tile
- Hard materials such as: granite, slate, and rustic tiles

RB2S porcelain tile cutting disc

Dry-cutting blade for porcelain tile. High performance and cutting speed with high quality finishes. Only for straight cut, do not use for miters.

- Dimensions:
- Outer diameter: 115 mm
 - Inner diameter: 22.2 mm
 - Disk pad height: 7 mm
 - Disk pad thickness: 1.4 mm

SAP	Description
100097327	115 mm



- Dry cutting
- Porcelain tile

RB2H porcelain tile cutting blade

Wet-cutting blade for porcelain tiles. Suitable for all kinds of ceramic tiles and stone with a thickness greater than 25 mm.

- Dimensions:
- Outer diameter: 250 mm
 - Inner diameter: 25.4 mm
 - Disk pad height: 7 mm
 - Disk pad thickness: 2.2 mm

SAP	Description
100179061	250 mm



- Wet cutting
- Porcelain tile

RB3S multifunctional cutting disc

Multifunctional dry-cutting blade. High performance and cutting speed with greater resistance to high temperatures. Only for straight cut, do not use for miters.

- Dimensions:
- Outer diameter: 115 mm
 - Inner diameter: 22.2 mm
 - Disk pad height: 4 mm
 - Disk pad thickness: 2.4 mm

SAP	Description
100224224	115 mm



- Dry cutting
- Metal, plastic, and wood
- Ceramics and natural stone

RB3H porcelain tile fine cutting blade

Wet-cutting blade for porcelain tiles with thickness under 25 mm. Specially recommended for mitering porcelain tiles.

- Dimensions:
- Outer diameter: 250 mm
 - Inner diameter: 25.4 mm
 - Disk pad height: 7 mm
 - Disk pad thickness: 2.2 mm

SAP	Description
100006080	250 mm



- Wet cutting
- Porcelain tile
- Fine cutting

RB3H glass mosaic cutting blade

Wet-cutting blade for glass mosaic. Maximum cutting quality, suitable for all kinds of ceramic tiles and stone with a thickness greater than 25 mm.

- Dimensions:
- Outer diameter: 250 mm
 - Inner diameter: 25.4 mm
 - Disk pad height: 7 mm
 - Disk pad thickness: 2.2 mm



- Wet cutting
- Glass mosaic
- Porcelain tile and other hard materials

SAP	Description
100228784	250 mm

TR1S metal fine cutting blade

Dry-cutting blade for stainless steel and metals in general. Specially recommended for precision work such as mitering in pro-skirting profiles.

- Dimensions:
- Outer diameter: 115 mm
 - Inner diameter: 22.2 mm
 - Disk pad thickness: 1 mm



- Dry cutting
- Metal profiles
- Very thin cut

SAP	Description
100227250	115 mm


Diamond bits


Diamond bits for dry-drilling all types of ceramic tiles, including porcelain tiles and other materials such as marble and granite.


SAP	Description
100145195	6 mm
100145196	8 mm
100145193	10 mm
100145194	12 mm
100005859	20 mm
100005860	28 mm
100005867	35 mm
100005861	43 mm
100005862	50 mm
100005863	60 mm
100005864	65 mm
100165336	68 mm
100179019	75 mm




- Dry drilling
- M13 thread
- Maximum drilling depth: 36 mm

Drilling Guide			
<p>The MULTIDRILL guide allows for an effective centering in the drilling the holes both in dry cutting and wet cutting.</p> <p>With high accuracy and reliability, the MULTIDRILL guide ensures a precise perforation and prevents potential movements of the bit.</p>			
<p>SAP 100171116</p>		 <ul style="list-style-type: none">- Dry or wet drilling- Fastening using suction cup- Suitable for drills up to Ø 83 mm	

Maintenance kit for cutting machines			
<p>- It includes cloth and cleaning and lubricating oil bottle.</p> <p>- This kit includes a fine cleaning cloth and a bottle of cleaning and greasing oil, suitable for the perfect maintenance of construction machinery, guiding and sliding systems, swiveling axis, threads, etc.</p>			
<p>SAP 100007786</p>			


L 80 mixer rod			
<p>Mixer rod for liquids with a propeller designed to carry out an up-and-down movement.</p> <p>With this type of rod the material is sucked on the inside from the top of the head, and ascends on the outside, at a lower speed. This downward movement is the most suitable and recommended for mixing low-viscosity materials such as paints, insulation, adhesives in dispersion, fibers, gypsum, etc.</p>			
<p>SAP 100006101</p>		 <ul style="list-style-type: none">- Suitable for liquids and other low-density and highly fluid materials.- Hexagonal connection.- Mixing capacity: 5-15 kg	
<p>Description Ø 80 mm Height: 400 mm</p>			

M 140 mixer rod			
<p>Mixer rod for cement-based mortars with a propeller designed to carry out an up-and-down movement.</p> <p>With this type of rod the material goes up at low speed, on the inside of the rod head, and down on the outside of it, and achieves a uniform mix of highly viscous materials such as mortars, cements, and especially improved cement-based adhesives (type C2) for ceramic tile.</p>			
<p>SAP 100184115</p>		 <ul style="list-style-type: none">- Suitable for cement-based adhesives, paints, and other materials.- Exclusive use with mixers with FAST-IN connection system- Quick connection without tools	
<p>Description Ø 140 mm</p>			

Plastic hod

Hod manufactured in high-density polyethylene with high sturdiness suitable for all types of work.

This hod combines high strength, excellent flexibility, and a great lightness (weight 1.18 kg)




- Reinforced handles. Greater resistance.
- Greater comfort during use.
- Lightweight.

SAP	Description
100179055	40 l 33 cm x 44 cm Ø base

0.5 mm Self-leveling spacers

0.5 mm wide self-leveling spacer for leveling floors and walls. It marks a 0.5 mm tiling joint between tiles

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation. Specially recommended for rectified tiles and installation with a minimal joint




- Installation of 6-15 mm thick tiles
- Yellow

SAP	Description
100207811	0,5 mm 100 ud/bag
100207797	0,5 mm 300 ud/bag
100207740	0,5 mm 500 ud/bag

Plastic bucket

Calibrated bucket with spout and reinforcement apron that makes the handling of liquids easier, preventing their spill.

Made of high-density polyethylene with very thick walls and reinforcing vertical ribs, which has a high resistance allowing all types of work.
Weight: 1.20 kg




- Embossed calibration.
- With spout to prevent from spilling material.
- Wall with reinforcing ribs.

SAP	Description
100179039	15 l

1 mm Self-leveling spacers

1 mm wide self-leveling spacer for leveling floors and walls. It marks a 1 mm tiling joint between tiles

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation. Specially recommended for rectified tiles and installation with a minimal joint




- Installation of 6-15 mm thick tiles
- White

SAP	Description
100108026	1 mm 100 ud/bag
100108027	1 mm 300 ud/bag
100108028	1 mm 500 ud/bag

Cutting pliers

Pliers for cutting mosaic with hard tungsten carbide edge, perfect for cutting tile or other glass mosaic pieces.

The curved cutting notches of these pliers provide a clean and safe cut on fragile and easy to break materials. It reduces the pressure to make to get a good cut.




- Cutting mosaic pieces
- Maximum cutting thickness: 15 mm
- Two-material ergonomical handle

SAP	Description
100005996	

2 mm Self-leveling spacers

2 mm wide self-leveling spacer for leveling floors and walls. It marks a 2 mm tiling joint between tiles

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation.



- Installation of 6-15 mm thick tiles
- Black

SAP	Description
100344039	2 mm 100 ud/bag
100344038	2 mm 300 ud/bag
100344037	2 mm 500 ud/bag


3 mm Self-leveling spacers

Raiser for self-leveling spacers

3 mm wide self-leveling spacer for leveling floors and walls. It marks a 3 mm tiling joint between tiles

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation.

SAP	Description
100109070	3 mm 100 ud/bag
100109071	3 mm 300 ud/bag
100109072	3 mm 500 ud/bag




- Installation of 6-15 mm thick tiles
- Gray

Raiser for installation of tiles with thickness not exceeding 6 mm.

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation. Especially recommended for XTONE type slabs

SAP	Description	Price
100123264	4 mm 50 ud/bag	



- Installation of 3-6 mm thick tiles
- Black
- Reusable


5 mm Self-leveling spacers

Pliers for self-leveling spacers

5 mm wide self-leveling spacer for leveling floors and walls. It marks a 5 mm tiling joint between tiles.

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation. Specially recommended for exteriors. Made with 100% recycled polyamide.


SAP	Description
100275166	5 mm 100 ud/bag
100275156	5 mm 300 ud/bag
100275138	5 mm 500 ud/bag



- Installation of 6-15 mm thick tiles
- Green

Hand tool for adjustment between wedge and self-leveling spacer.

SAP
100095386



- Adjustable from 5 to 15 mm in height
- Ergonomic plastic handle


Wedge for self-leveling spacers

Self-leveling spacer kit

Wedge for installation of self-leveling spacers. It prevents movement between tiles by removing the risk of emergence of ledges or "lipping"

Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation.

SAP	Description
100108031	5 - 20 mm 100 ud/bag
100108032	5 - 20 mm 300 ud/bag
100095383	5 - 20 mm 500 ud/bag




- Installation of 3-6 mm thick tiles
- Black
- Reusable

Leveling system for ceramic tiles. Makes installation of ceramic tiles easier and guarantees a perfectly flat surface of the final installation.

Before using the self-leveling spacer system, carry out a pre-test with the type of wall covering or flooring to install and check that during the separator breaking process the tile is not damaged, especially in embossed or rectified not-beveled tiles.

SAP	Descripción
100213808	0,5 mm
100108034	1 mm
100350100	2 mm
100109074	3 mm
100275157	5 mm



- Installation of 3-15 mm thick tiles
- It includes: 100 separators, 100 wedges, and assembly pliers

Coverage table

Spacer coverage			
Tile			spacers
cm		a x b	m²
20	31.6	20 x 31.6	64
20	33.3	20 x 33.3	61
31.6	44.6	31.6 x 44.6	29
33.3	44.6	33.3 x 44.6	27
33.3	66.6	33.3 x 66.6	23
31.6	59.2	31.6 x 59.2	22
31.6	90	31.6 x 90	18
33.3	100	33.3 x 100	16
45	120	45 x 120	12

21.5	65.9	21.5 x 65.9	36
21.9	66.6	21.9 x 66.6	35
14.3	90	14.3 x 90	39
22	90	22 x 90	26
19.3	120	19.3 x 120	26
19.3	180	19.3 x 180	21
29.4	120	29.4 x 120	18
29.4	180	29.4 x 180	14
25	150	25 x 150	16




31.6	31.6	31.6 x 31.6	41
44.3	44.3	44.3 x 44.3	21
44.6	44.6	44.6 x 44.6	21
43.5	65.9	43.5 x 65.9	18
43.5	65.9	43.5 x 65.9	18
44	66	44 x 66	18
40	80	40 x 80	16
45	90	45 x 90	13
59.6	59.6	59.6 x 59.6	12
80	80	80 x 80	10
59.6	120	59.6 x 120	9
120	120	120 x 120	6

100	100	100 x 100	6
120	120	120 x 120	6
100	300	100 x 300	4
120	250	120 x 250	4

x	25	50	75	100	125	150
25	64	32	27	20	20	16
50	32	16	14	10	10	8
75	27	14	11	8	8	7
100	20	10	8	6	6	5
125	20	10	8	6	6	5
150	16	8	7	5	5	4

Tiling joint spacers

Plastic spacers for precise adjustment of tiling joint width

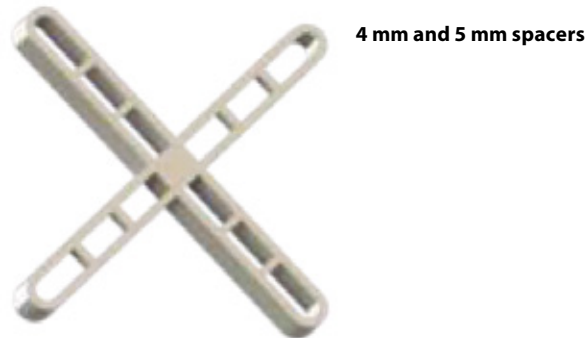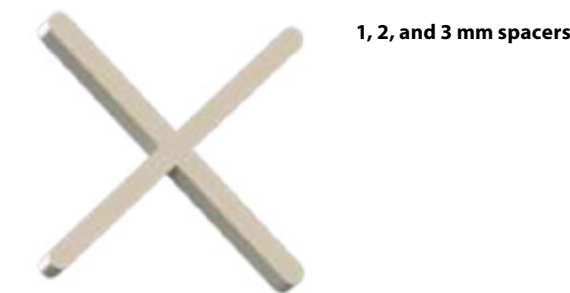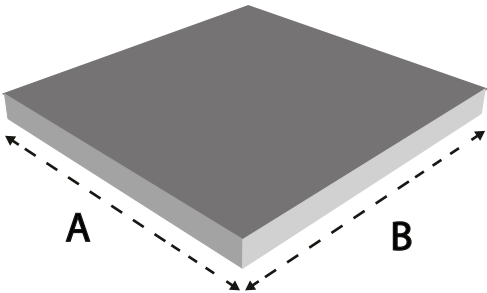

SAP	Description
100006030	1 mm 300 ud/bag
100006031	1,5 mm 300 ud/bag
100006059	1 mm 1000 ud/bag
100006032	2 mm 300 ud/bag
100006058	2 mm 1000 ud/bag
100006034	3 mm 200 ud/bag
100006057	3 mm 1000 ud/bag
100006036	4 mm 200 ud/bag
100006056	4 mm 1000 ud/bag
100006037	5 mm 100 ud/bag
100006055	5 mm 1000 ud/bag

- Solid 15 mm arm spacer.
- Recoverable

Hard wedges

Plastic wedges for precise adjustment of tiling joint width



- Solid 30 mm long wedge
- Recoverable

SAP	Description
100006060	5 mm 500 ud/bag
100006061	7,5 mm 500 ud/bag

RFLEX handle notched trowel

Notched trowel with steel sheet and open RFLEX handle, for the application of adhesives for installation of ceramics

The open-handle trowel and comb models make their control easier when applying the material. One of the characteristics that professional ceramic tile installers love is this type of open handle; thanks to its open aperture, the tool can be hung from the edge of the bucket, hod, or any other container holding the material to be applied. This allows them to have the trowel or comb always at hand and clean.

SAP	Description
100031415	28 cm 3 x 3 mm
100037970	28 cm 4,5 x 4,5 mm
100007963	28 cm 6 x 6 mm
100007924	28 cm 8 x 8 mm
100007960	28 cm 10 x 10 mm
100047286	28 cm 12 x 12 mm
100008432	28 cm R-10 mm



- Special high-resistance steel sheet.
- Protection against corrosion with colorless varnish.
- Ergonomic open handle with aluminum core.

MMC handle notched trowel

Notched trowel with steel sheet and MMC closed handle, for applying adhesives for installation of ceramics

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.

SAP	Description
100005923	28 cm 3 x 3 mm
100005920	28 cm 6 x 6 mm
100005918	28 cm 8 x 8 mm
100005916	28 cm 10 x 10 mm
100005914	28 cm 12 x 12 mm



- Special high-resistance steel sheet.
- Protection against corrosion with colorless varnish.
- Closed wood handle, soft touch.

MBC handle notched trowel

Notched trowel with steel sheet and MBC closed handle, for applying adhesives for installation of ceramics

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.

SAP	Description
100079169	27 cm 10 x 10 mm
100213920	28 cm 12 x 12 mm



- Special high-resistance steel sheet.
- Protection against corrosion with colorless varnish.
- Ergonomic closed handle with two textures.

MMC handle 48 cm notched trowel

Notched trowel with steel sheet and MMC closed handle, for applying adhesives for installation of ceramics

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.

SAP	Description
100049467	48 cm 10 x 10 mm



- Special high-resistance steel sheet.
- Protection against corrosion with colorless varnish.
- Closed wood handle, soft touch.

MMA handle notched trowel

Notched trowel with steel sheet and open MMA handle, for the application of adhesives for installation of ceramics

The open-handle trowel and comb models make their control easier when applying the material. One of the characteristics that professional ceramic tile installers love is this type of open handle; thanks to its open aperture, the tool can be hung from the edge of the bucket, hod, or any other container holding the material to be applied. This allows them to have the trowel or comb always at hand and clean.

SAP	Description
100145161	28 cm 6 x 6 mm
100145162	28 cm 8 x 8 mm
100145159	28 cm 10 x 10 mm
100145160	28 cm 12 x 12 mm



- Special high-resistance steel sheet.
- Protection against corrosion with colorless varnish.
- Wood open handle, soft touch.

Abrasive block for corners

Abrasive block for ceramics with two sides of different particle size. Suitable both for rectifying cuts and minor deviations and for softening edges and glazing flaws.

The coarser grain of the abrasive block is used for reducing irregularities or small bumps obtained after cutting the ceramic tile, while the thinner grain is used to define and eliminate the chipping caused by scratching or cutting of the material and thus obtain a perfect finish.

SAP	Description
100007785	150 x 50 mm




- Two textures: coarse and fine grain

Simple suction cup

Tool for handling tiles, specially recommended for large-formats

Simple and easy to use; especially recommended in small formats




- Up to 40 kg
- Up to 120 x 120 x 1.2 mm tiles
- Ergonomic open closed handle.

SAP	Description
100005983	Ø 12 cm Simple

Double suction cup

Tool for handling tiles, specially recommended for slabs and tiles weighing over 35 kg

Manufactured in aluminum, it has an ergonomic open handle that facilitates the handling of the slabs and ceramic tiles. Do not use with formats smaller than 350 mm.




- Up to 80 kg
- All kinds of tile formats and thicknesses.
- Maximum comfort and ease of use

SAP	Description
100110173	Ø 12 cm Double

Vacuum suction cup

Tool for handling tiles, specially recommended for heavy or embossed-surface tiles.



- Up to 130 kg
- Tiles of all kinds of format, thickness and texture.
- It includes case

SAP	Description
100275036	Ø 17,5 cm + Briefcase

Rubber mallet flat/round ends

Mallet for good settlement and correct positioning of ceramic tiles during their installation.

White rubber malets will reduce risk of stains on the tile surface.




- Rubber mallet with one flat and one round face.
- Flat face for strong blows
- Round face for blows with any angle; maximum precision

SAP	Description
100212000	500 gr white

Rectangular spirit level

Spirit level for making levels during the installation of ceramics

Made of aluminum, it has a machined base to ensure constant accuracy, magnets for mounting on metal surfaces, and rubber protectors resistant to impacts on both ends.



- Three spirits for checking horizontal, vertical, and 45° levels.
- Accuracy: 0.5 mm/m
- Manufactured in aluminum profile.

SAP	Description
100152164	50 cm

Putty applicator

Hand extruder for 280 / 300 ml cartridges for all types of putties

Double cam with elastic damper. Less effort for higher performance.




- 280 / 300 ml cartridges
- Maximum cartridge: 215 mm x Ø 48 mm
- Ergonomic handle and trigger

SAP	Description
100032733	

MMC handle epotech trowel

Rubber trowel for epoxy-type joint materials. Specially recommended for joints over 3 mm wide.

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.




- Applying epoxy joints
- Solid rubber sheet
- Closed wood handle, soft touch.

SAP	Description
100047229	25 cm Solid rubber

MBC handle colorstuk trowel

Rubber trowel for cement-based joint materials. Specially recommended for joints up to 3 mm wide.

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.




- Applying cement-based joints
- Rubber sheet with intermediate natural rubber sheet
- Ergonomic closed handle.

SAP	Description
100005942	25 cm MBC handle

MMC handle colorstuk trowel

Rubber trowel for cement-based joint materials. Specially recommended for joints up to 3 mm wide.

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle.




- Applying cement-based joints
- Rubber sheet with intermediate natural rubber sheet
- Closed wood handle, soft touch.

SAP	Description
100005941	25 cm MMC handle

Rubber float for joints

Float with closed plastic handle plus rubber trowel for applying cement-based joint materials. It includes an interchangeable rubber sheet for applying cement-based joint materials. Specially recommended for joints up to 3 mm wide.

The closed handle provides a symmetrical, perfect tool to be used both by right and left-handed persons, while it is a more centered tool and easier to control and handle. It includes a float and a sponge




SAP	Description
100223791	It includes float + sponge
100223764	1 sponge

- Sponge length: 29 cm
- Applying cement-based joints
- Medium-density rubber

Rubber trowel for cement-based joints

Basic rubber trowel for cement-based joint materials.

Each side of the trowel has a different edge angle: 42° for narrow joints, and 18° for wide joints




- Applying cement-based joints
- Soft rubber

SAP	Description
100223793	25 cm

Rubber trowel for epoxy joints

Basic rubber trowel for epoxy joint materials.

Each side of the trowel has a different edge angle: 42° for narrow joints, and 18° for wide joints



- Applying epoxy joints
- Hard rubber

SAP	Description
100223749	25 cm

Float with sponge

Float with closed plastic handle plus interchangeable sponge with soft texture for fine finish. Specially recommended for cleaning of cement-based joints.

It includes a soft sponge for fine finish

SAP	Description
100085716	30 x 13 cm



- Cleaning of cement-based joints
- It includes a float and a sponge

Float for final cleaning

Float with abrasive scourers for cleaning ceramic surfaces and other coating materials.

25 x 10 cm, 25 mm thick interchangeable scourers:
• Red: Soft texture, ideal for cleaning slightly-attached dirt and maintenance on delicate surfaces.
• Blue: Medium texture, ideal for general cleaning and maintenance of glazed ceramic tiles.
• Brown: Strong texture, ideal for cleaning strongly-attached dirt and maintenance of rough and very resistant surfaces.

SAP	Description
100005970	25 x 10 cm



- Cleaning of ceramic surfaces and other materials
- Float with plastic handle
- 1 float + 3 scourers

Plastic handle and colorstuk sponge replacements

Interchangeable sponge with soft texture for fine finish. Specially recommended for cleaning of cement-based joints.

SAP	Description
100085715	30 x 13 cm
250060389	plastic handle



- Cleaning of cement-based joints
- Soft sponge. Fine finish
- 1 unit

Replacement very soft scourers

Interchangeable scourers for maintenance cleaning and waxing surfaces and delicate materials.

SAP	Description
100223699	1 unit
100005894	3 units



- Cleaning of ceramic surfaces and other materials
- Very soft scourers
- Sponge size: 25 x 10 cm

Plastic handle and epotech sponge replacements

Interchangeable cellulose sponge for cleaning with acid or solvent-based chemicals and especially for cleaning epoxy joints.

Maximum strength and degree of absorption.

SAP	Description
100179043	30 x 13,5 cm
100243030	plastic handle



- Cleaning epoxy joints
- 100% vegetable cellulose sponge
- 1 unit

Replacement strong scourers

Interchangeable scourers for cleaning strongly-attached dirt and maintenance of rough and very resistant surfaces.

SAP	Description
100005895	3 units




- Cleaning of ceramic surfaces and other materials
- Strong scourers
- Sponge size: 25 x 10 cm

Pail for cleaning joints

Pail for wringing sponges used in the cleaning of joints. High drain capacity.

High-strength pail with 4 wheels and transport handle




- Wringing of cleaning sponges
- 3 wringing spiral rollers and grid base
- Measurements: 53 x 28 x 37 cm.

SAP	Description
100229783	Max cap.: 22 l Use cap.: 10 l

Colorstuk sponge

High-absorption cleaning sponge for all kinds of on-site work. Specially recommended for cement-based joints.



- Cleaning of cement-based joints
- Soft sponge. Fine finish
- 1 unit

SAP	Description
100223785	16 x 12 x 7 cm

Special n epoxy sponge

High-absorption cleaning sponge specially recommended for cleaning tasks with acid- or solvent-based chemical agents, and particularly for cleaning epoxy grout.



- Epoxy grout cleaning
- Soft sponge. Fine finish
- 1 unit

SAP	Description
100327976	16 x 12 x 7 cm

Epoxy cleaning kit

Cleaning kit for epoxy joint remains before their final hardening. It includes an epotech cleaner bottle, water-based detergent for cleaning off epoxy putties remains and stains.

- It includes:
- 1 MMC handle epotech trowel
 - 1 Epoxy sponge
 - 1 Float for final cleaning + 3 scourers
 - 1 200 ml epotech cleaner bottle

SAP
100113684



- Cleaning of epoxy remains
- Professional use

Hand scraper for joints

Joint scraper for emptying of tiling joints. It allows for the use of one, two, or three blades at the same time, allowing the emptying of 2 to 6 mm-wide joints.

It includes two interchangeable 2 mm wide tungsten carbide blades.

SAP
100005988
100007783



- Joint width: 2-6 mm
- 2 mm-wide blades made of tungsten carbide.
- Ergonomic handle

Metal profile cleaner

Metal polishing

Apply on a soft cloth and rub on the surface to clean

SAP	Description
100252184	125 ml



- Chromed surfaces
- Aluminium
- Hard PVC

Confort Knee pads

Butech protect kit

Padded base for the porcelain tiles fitter. It protects the knees and avoids the spots of adhesive.

Last generation of expanded polypropylene, recyclable 100%. Used material: Non-polluting, with excellent memory capacities and a long service life.

It allows up to 130Kg of load. Use only on a flash horizontal surface.



SAP	Description
100279785	Confort Knee pads

RM1 knee pads

Set of knee pads for the floor installer. It protects knees and prevents stains from contact with the adhesive.

It includes two elastic fastening straps for each of the two knee pads



SAP	Description
100223779	Set of 2 knee pads
100223790	Replacement strap (1 unit)

Flooring protection system using rigid polypropylene plates protecting against medium and low-type impacts, dragging, or surface abrasion. Reusable.

Manufactured in alveolar polypropylene, it resists contact with the water, as well as with the products most commonly used in construction such as cement, plaster, or construction cleaners.



SAP	Description
100203407	Kit 15,5 m² / kit

- Protection of floors during construction works
- It includes: 5 2,8 m² slabs plus case of the same material (1.5 m²)
- Slab measurements: 140 x 200 cm x 2 mm wide

Butech protect adhesive tape

Self-adhesive tape for the union between butech protect slabs.



SAP	Description
225008690	Adhesive tape 132 m/roll

- Self-adhesive tape
- Tape width: 48 mm

butech

PORCELANOSA Grupo

PROFESSIONAL TOOLS 05-2024

Design and photography: butech Marketing Department

Edited by: butech building technology, S.A.U.

Print:

butech building technology, S.A.U.

Ctra. Vila-real - Puebla de Arenoso
(CV-20) Km 2,5. Vila-real (Spain)

+34 964 53 62 00

butech@butech.es



www.butech.net

The contents of this catalog are protected by Intellectual Property Law, Royal Decree 1 / 1996.
Any reproduction of it, in whole or in part, without the consent of PORCELANOSA
Grupo is liable under the Penal Code.

