



PORCELANOSA Grupo

shower deck n

The completely flat shower tray

butech
PORCELANOSA Grupo

shower deck n

New concept shower tray with hidden drain for the most exclusive bathrooms. This new shower-tray system creates a sense of continuity with the rest of the bathroom floor because the slopes are hidden under the floor. Drainage is achieved through open joints and does not require a drainage grille.

The **shower deck n** system is a shower consisting of a polyurethane base coated with thermostable polymer, ready for tiles without any need for adhesive. Especially recommended for bathroom refurbishments.

shower deck n TECHNICAL INFO


Main characteristics

- Flat shower tray without slopes.
- Compatible with porcelain floor planks of a thickness equal to or greater than 6mm.
Non-slip tile finish recommended.
- Polyurethane coated with thermostable polymers.
- Concealed drainage sink.
- Ultra-thin shower tray; only 30 mm high.
- Easy to clean and highly resistant to household detergents.
- Virtually no maintenance, especially when compared to wooden decking.
- Thermal insulation.

Recommended uses

- Shower trays and cabins in every type of bathrooms.
- Shower trays for private and public use.
- Bathrooms adapted for people with reduced mobility.
- Bathrooms for the disabled.

shower deck n SHOWER TRAY COMPONENTS

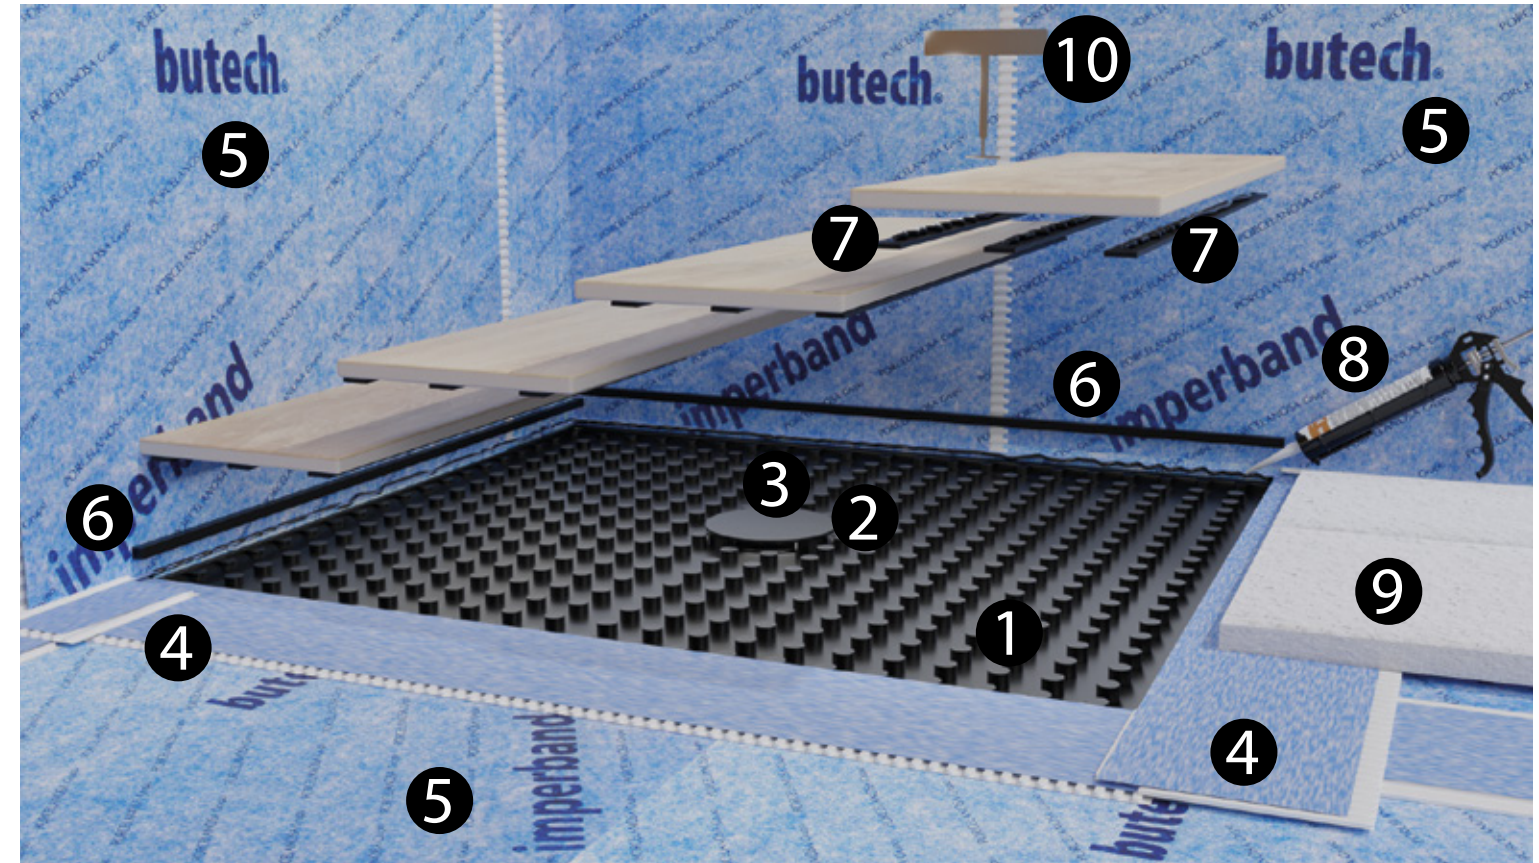

1. Shower deck n tray. Thickness: 30mm
2. Horizontal non-return siphonic drain. Height 60mm. Outlet Ø 40mm and 0.52 l/s.
3. Drain reinforcement.
4. **lamiband 200** roll. 5 linear meters (1 u)
5. **imperband** roll. 5 meters² (1 u)
6. PVC LEVELING profiles 14X14X2 units Long + 1 unit Wide of the tray (Max. 2000 mm) (3 units).
7. UNION profiles for tiles 30x4xLong of the tray, max. 2000 mm (units vary according to width of chosen tiles)
8. Two **P-404** tubes
9. Protection plate
10. Manhole key
11. Instructions

shower deck n
UNLIMITED BATHROOM
DESIGN



Ascot arce 19,3x120 cm

Shower deck n tray 121,6x93,8 cm



Manhatan Colonial anti-slip 19.3 x 180 cm

Shower deck n tray 80x120 cm



Oxford castaño 22x90 cm

Shower deck n tray 121,6x93,8 cm



Newport beige 33,3x100 cm

Shower deck n tray 80x93,8 cm




Houston taupe 120x29,4

Shower deck n tray 121,6x93,8 cm



Montana honey 19,3x120 cm

Shower deck n tray 121,6x93,8 cm

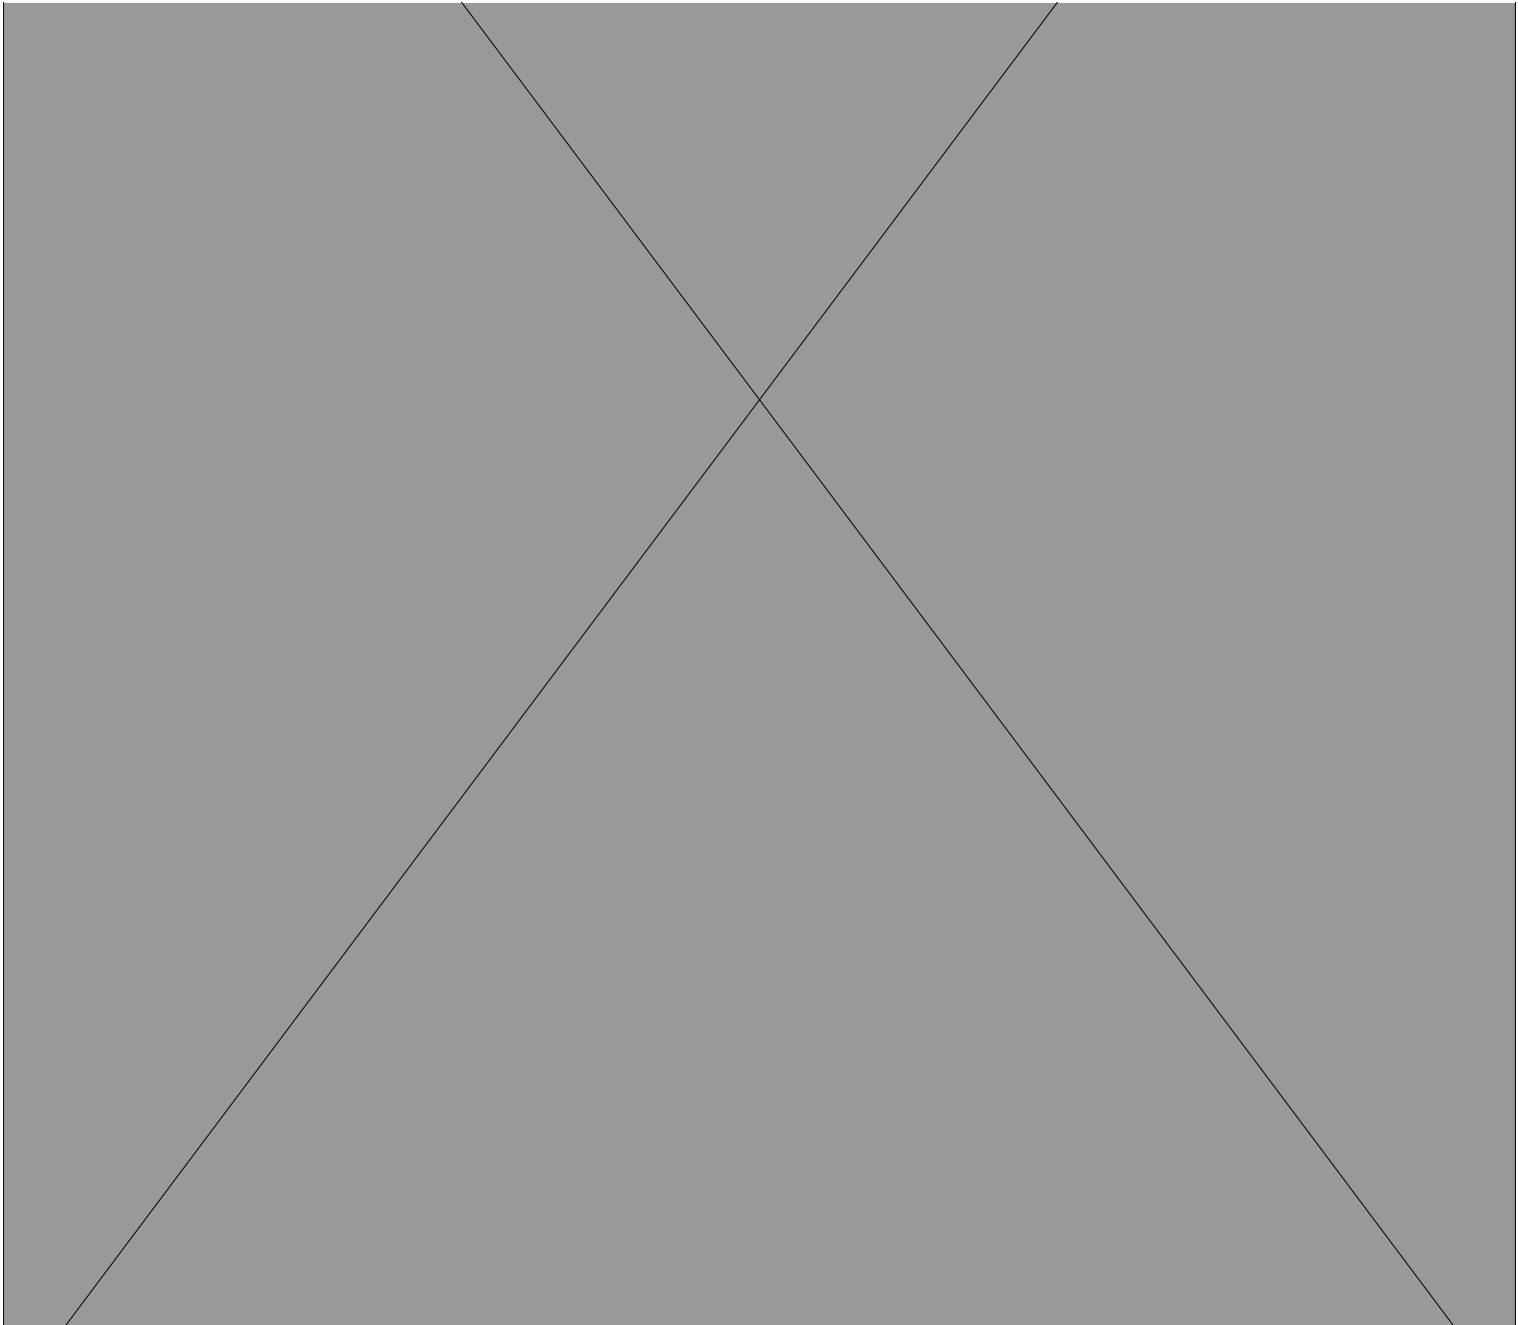

Ascot Arce 29.4X120 cm

Shower deck n tray 121,6x93,8 cm




Manhattan cognac 29,4x180 cm

Shower deck n tray 121,6x93,8 cm

shower deck n


SELECTING THE SHOWER TRAY

Lateral shower head less than or equal to 35 cm

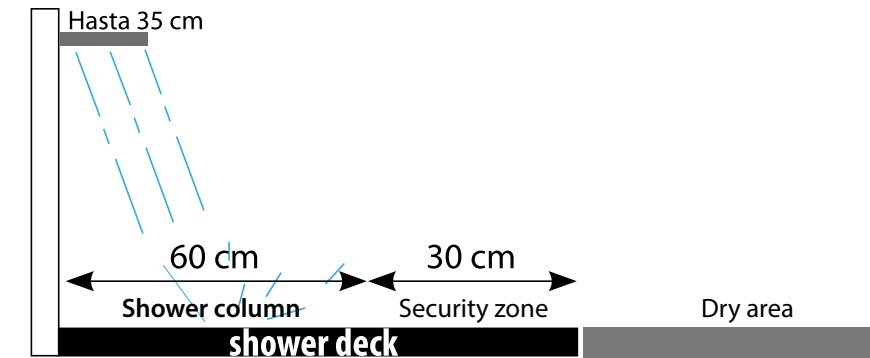


Recommended **shower deck n**: 800 x 938mm, 900 x 938mm or 1216 x 938mm

Lateral shower r head equal to or greater than 35 cm

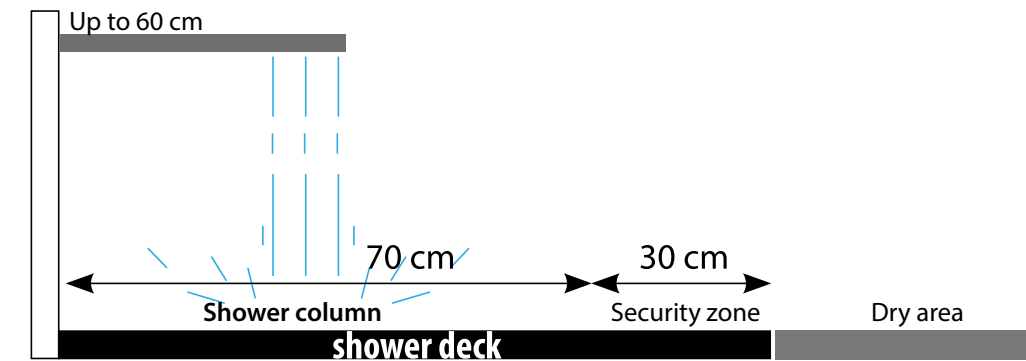

Recommended **shower deck n**: 1216 x 938mm

Central shower head less than or equal to 35 cm

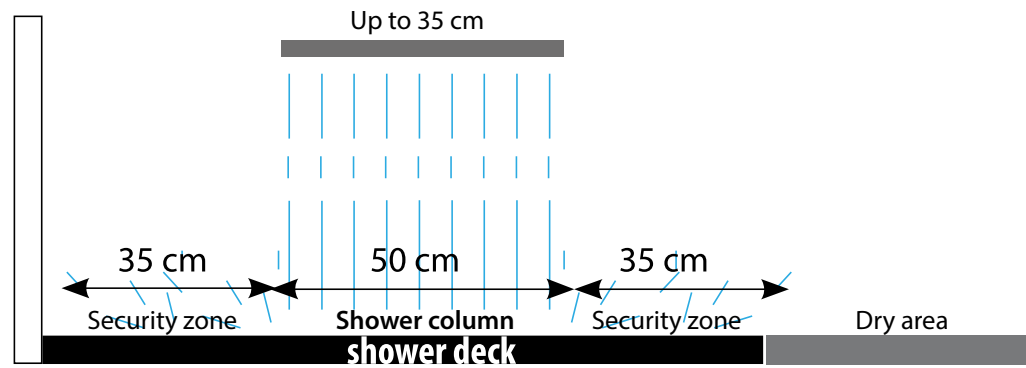

Recommended **shower deck n**: 1216 x 938mm

Shower tray selection criteria

The measure of the **shower deck n** does not have to exactly match the area of the tray, should only coincide with the area of drainage, where the water falls. Therefore the shower tray will depend on the type of rain/head/hand shower.

Extension of the drainage area: in bathroom renovation, when the drainage area is slightly larger than an available shower deck n reference, tiles on the **shower deck n** can be combined with a ceramic perimeter fixed to the substrate. In this case, it is recommended to fix the ceramic with a slight slope of 0.5%.




Oxford castaño 22x90 cm

Shower deck n tray 121,6x93,8 cm

shower deck n INSTALLATION DIAGRAM

Shower deck n diagram

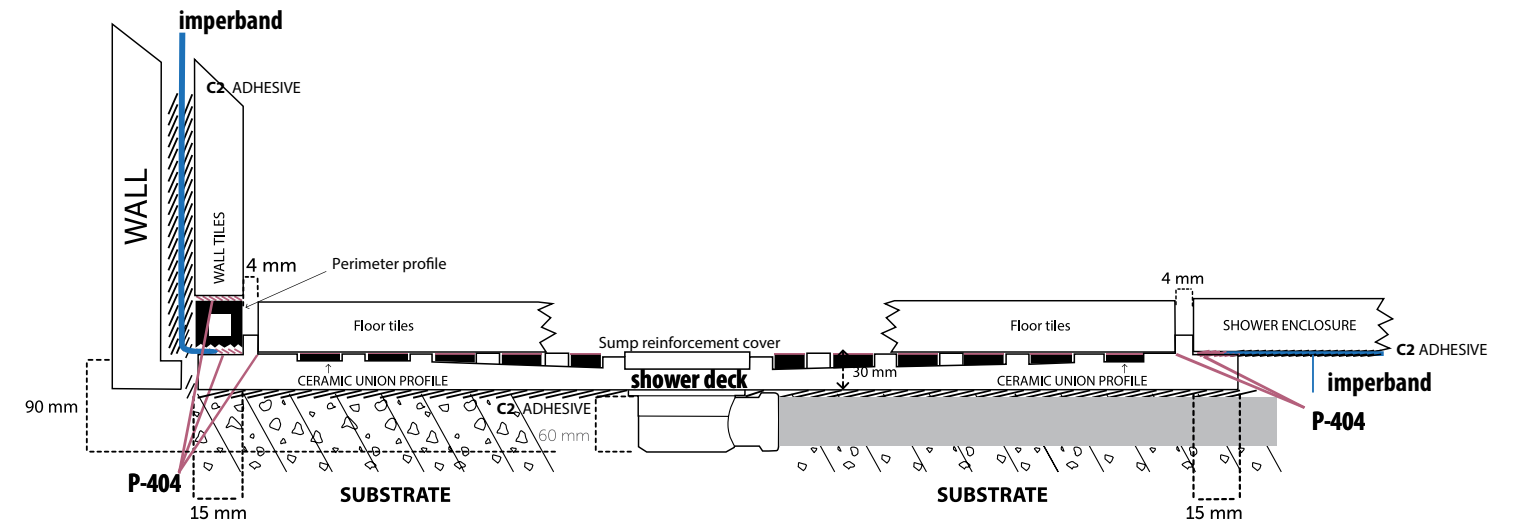

The **shower-deck** does not include tiles.

The tiles chosen for this covering require mechanical resistance. Therefore, they must have a thickness equal to or greater than 6 mm.

Do not use tiles with an absorption greater than 0.5% according to UNE-EN-ISO 10545-3.

shower deck n INSTALLATION DETAILS



When the **shower-deck** sits under wall tiles, it is recommended to use the PVC levelling profile (**SAP 250046210**).

With the use of this levelling profile, we increase the distance between the shower-deck tiles and the wall, avoiding possible damage during lifting and handling.



For a correct separation between the **shower-deck** tiles, it's recommended leaving a 4mm open joint between each tile (**SAP 100225510**).



As in other shower systems, the planimetry in the installation of the **shower-deck** is crucial. It is required that the shower-deck does not fit forcefully or under pressure. The support where the installation is going to be carried out must be completely flat, levelled and with a solid base, in order to achieve a proper installation of the tiles on top.

Once the installation is finished, seal the perimeter joints.


shower deck n

HOW TO PLACE AN ORDER

Information needed to place a **shower deck n** order:

- Shower tray length (mm): maximum length 2000 mm*
- Shower tray width (mm): maximum width 1300 mm*
- Sump Position. Recommended distance to either side: 300 mm

* Shower trays with larger dimensions are supplied in two pieces.

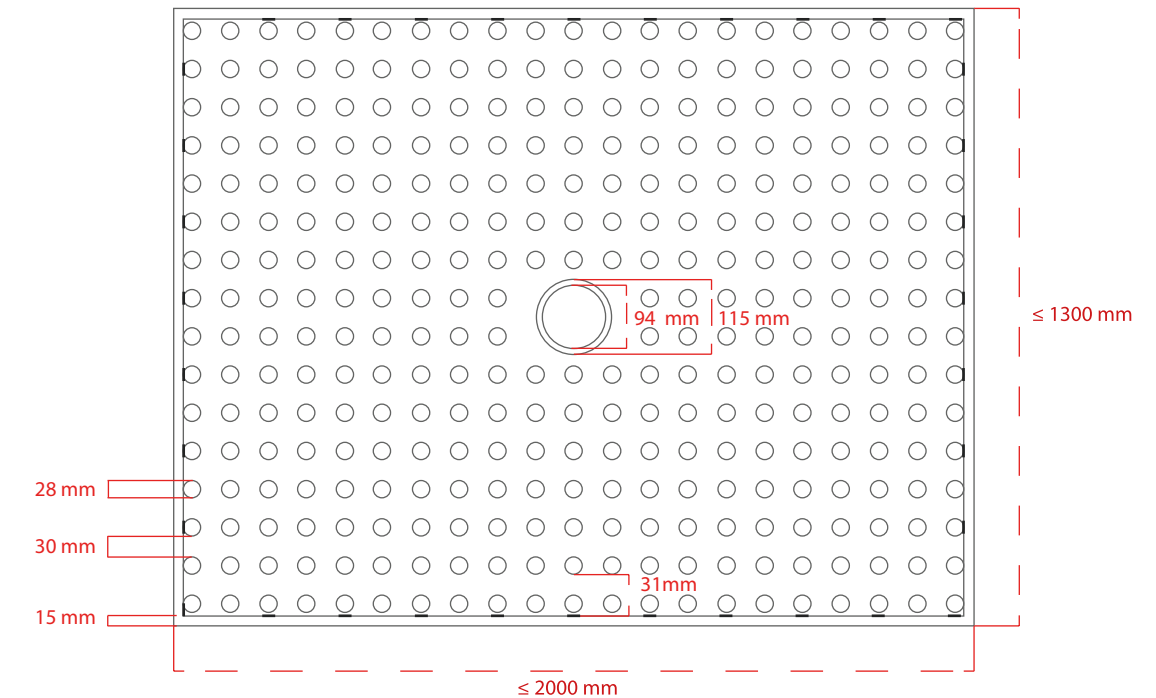

The **shower deck n** kit includes a horizontal drain with non-return valve. When a different drain is needed, use one of the following references:

| | |
|-----------|--|
| 250045810 | Horizontal SWD drain with standard valve |
| 250049540 | Vertical SWD drain with standard valve |
| 250049695 | High flow SWD drain + non-return valve |

shower deck n CUSTOM SHOWER TRAY

Standard references of shower deck n

For special measures trays, use: 100174848 Shower deck n TRAY SPECIAL MEASUREMENTS

PAR-KER® smart 22 x 90 cm

Shower Tray Measures

| Nº of pieces | Length (mm) | Length (mm) |
|--------------|-------------|-------------|
| 3 | 706 | 938 |
| 4 | 930 | 938 |
| 5 | 1154 | 938 |
| 6 | 1378 | 938 |
| 7 | 1602 | 938 |
| 8 | 1826 | 938 |

| PORCELANOSA |
|-------------|
| MINNESOTA |
| TANZANIA |
| VANCOUVER |
| FOREST |

PAR-KER® 19,3 x 120 cm

Shower Tray Measures

| Nº of pieces | Length (mm) | Length (mm) |
|--------------|-------------|-------------|
| 4 | 822 | 1238 |
| 5 | 1019 | 1238 |
| 6 | 1216 | 1238 |
| 7 | 1413 | 1238 |
| 8 | 1610 | 1238 |
| 9 | 1807 | 1238 |

| PORCELANOSA |
|-------------|
| ASCOT |
| OXFORD |
| BREMEN |

*Not available in stock, make to order.

Calculations for 4 mm joints

shower deck n CUSTOM SHOWER TRAY

Standard references of shower deck n

For special measures trays, use: 100174848 Shower deck n TRAY SPECIAL MEASUREMENTS*

PAR-KER® 19,3 x 180 cm

Shower Tray Measures

| Nº of pieces | Length (mm) | Width (mm) |
|--------------|-------------|------------|
| 3 | 890 | ≤1838 |
| 4 | 1188 | ≤1838 |
| 5 | 1486 | ≤1838 |
| 6 | 1784 | ≤1838 |

| PORCELANOSA |
|-------------|
| DELAWARE |
| DEVON |
| MANHATTAN |
| BRUSELAS |
| NOBU |
| GENT |

PAR-KER® 23 x 150 cm

Shower Tray Measures

| Nº of pieces | Length (mm) | Width (mm) |
|--------------|-------------|------------|
| 3 | 736 | 1538 |
| 4 | 970 | 1538 |
| 5 | 1204 | 1538 |
| 6 | 1438 | 1538 |
| 7 | 1672 | 1538 |

| PORCELANOSA |
|-------------|
| MINNESOTA |
| NEBRASKA |
| TANZANIA |
| VANCOUVER |

*Not available in stock, make to order.

Calculations for 4 mm joints



BY APPOINTMENT TO
H.R.H. THE PRINCE OF WALES
MANUFACTURER AND DISTRIBUTOR
OF CERAMIC TILES AND BUILDING PRODUCTS.
PORCELANOSA GROUP LIMITED

PORCELANOSA Grupo



butech building technology s.a.u.

Carretera Vila-real - Puebla de Arenoso CV-20 Apt./Box 297 12540 · Vila-real (Castellón) · Spain
Teléfono: (+34) 964 536 200 · Fax: 964 530 034 (Nacional) · Fax: (+34) 964 530 034 (Internacional)
e-mail: butech@butech.es
www.butech.es